

Revision History

Revision	Modification
Revision 2018/08/12	The Initial Formal Release


Description

The MSD05C is a bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast re-sponse time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The MSD05C complies with the IEC 61000-4-2 (ESD) with ± 30 kV air and ± 30 kV contact discharge. It is assembled into an ultra-small SOD-523 lead-free package. The small size and high ESD surge protection make MSD05C an ideal choice to protect cell phone, digital cameras, audio players and many other portable applications.


Features

- Low leakage: nA level
- Operating voltage: 5V
- Ultra low clamping voltage
- One data line protects
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: ± 25 kV
 - Contact discharge: ± 20 kV
 - IEC 61000-4-5 (Lightning) 8A (8/20 μ s)
- RoHS Compliant

Dimensions & Symbol (Unit: mm Max)



Package Dimensions



Circuit and Pin Schematic

Mechanical Characteristics

- Package: SOD-523
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Marking Information: See Below

Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players
- Keypads, Side Keys, LCD Displays

Marking Information



Details marking code reference specification of approval list

Ordering Information

Part Number	Packaging	Reel Size
MSD05C	3000/Tape & Reel	7 inch



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p=8/20\mu\text{s}$ waveform)	P_{ppp}	100	W
Peak Pulse Current (8/20 μs)	I_{pp}	8	A
ESD per IEC 61000-4-2 (Air)	V_{ESD}	± 25	kV
ESD per IEC 61000-4-2 (Contact)		± 20	
Operating Temperature Range	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			5	V	
Breakdown Voltage	V_{BR}	6		8	V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_R			0.2	μA	$V_{RWM} = 5\text{V}$
Clamping Voltage	V_C			8	V	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)
Clamping Voltage	V_C			15	V	$I_{PP} = 8\text{A}$ (8 x 20 μs pulse)
Junction Capacitance	C_J			20	pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$


Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

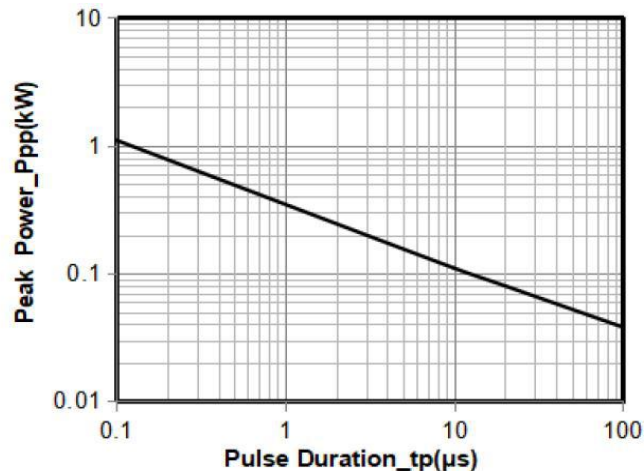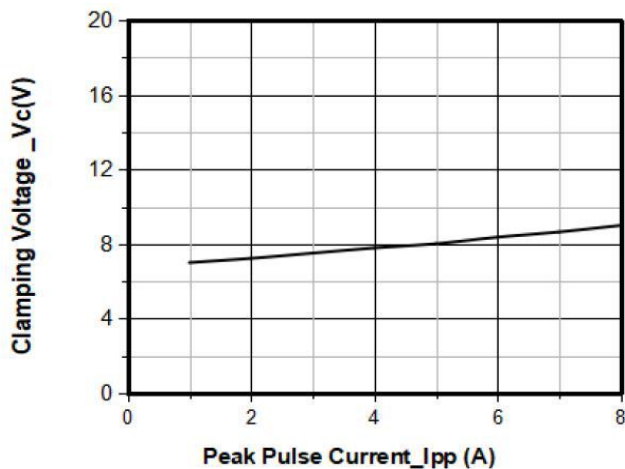


Junction Capacitance vs. Reverse Voltage

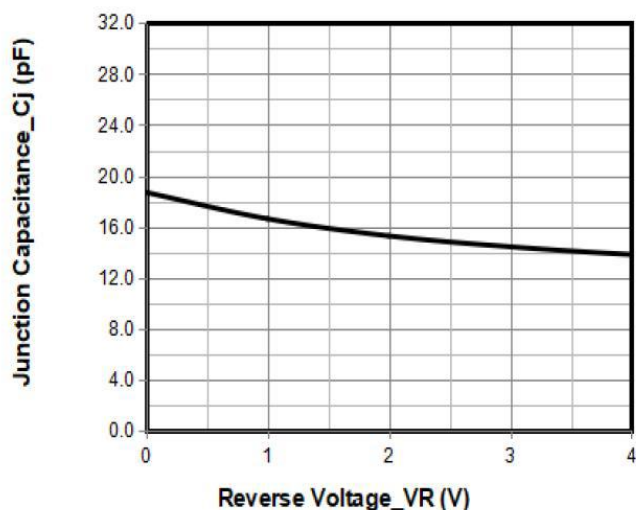

Peak Pulse Power vs. Pulse Time

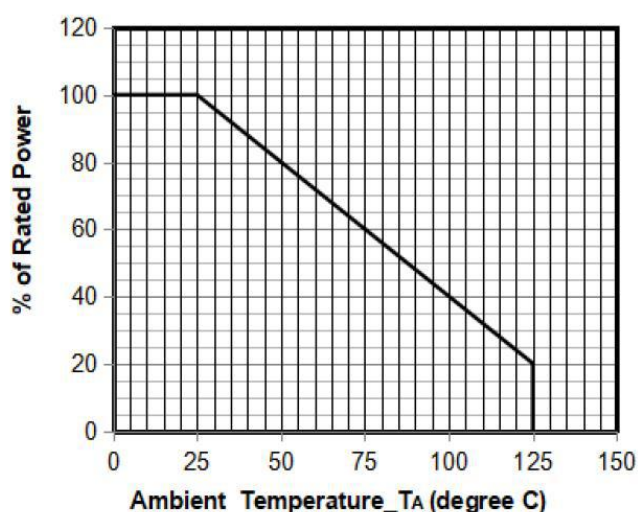


Clamping Voltage vs. Peak Pulse Current ($t_p = 8/20\mu\text{s}$)

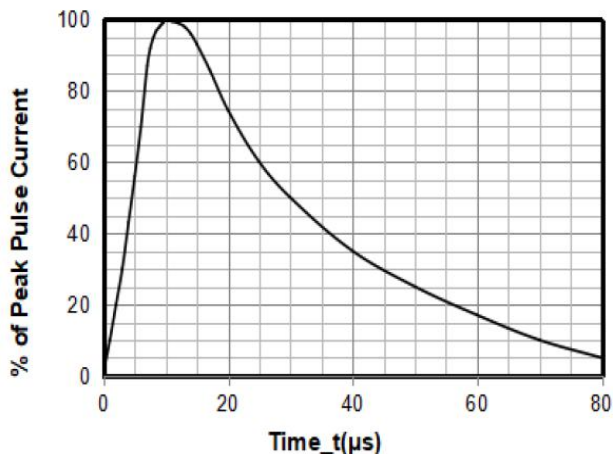

8 X 20 μs Pulse Waveform

Power Derating Curve

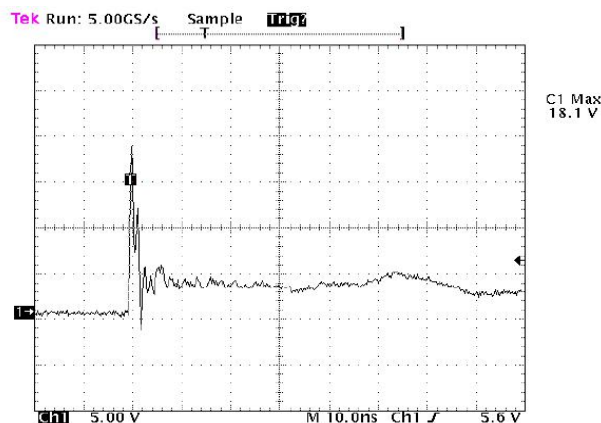


Note: Data is taken with a 10x attenuator

ESD Clamping Voltage


8 kV Contact per IEC61000-4-2

Soldering Parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L) (Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

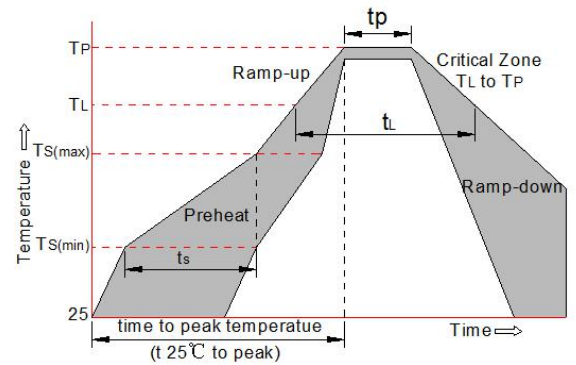


Package Mechanical Data

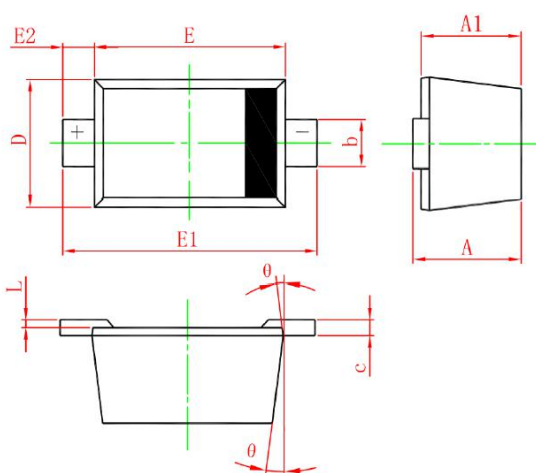


SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.51	-	0.77	0.020	-	0.031
A1	0.50	-	0.70	0.020	-	0.028
b	0.25	-	0.35	0.010	-	0.014
c	0.08	-	0.15	0.003	-	0.006
D	0.75	-	0.85	0.030	-	0.033
E	1.10	-	1.30	0.043	-	0.051
E1	1.50	-	1.70	0.059	-	0.067
E2	0.20REF			0.008REF		
L	0.01	-	0.07	0.001	-	0.003
Φ	7° REF			7° REF		

Suggested Land Pattern

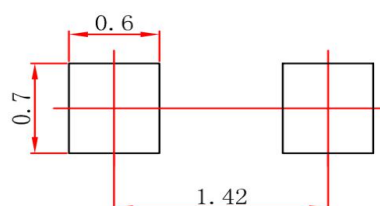

Tape size

Unit: mm

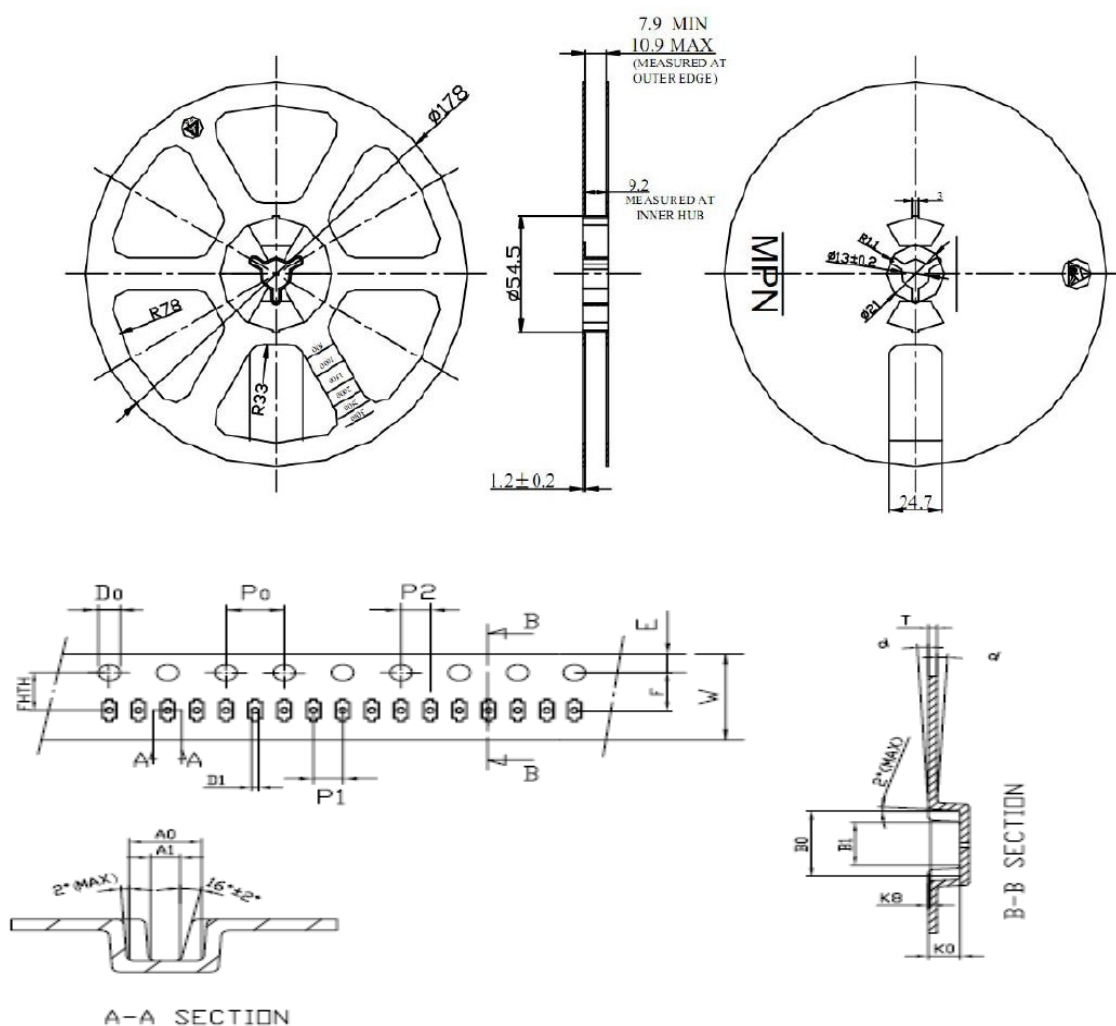

unit:mm

symbol	A0	B0	K0	P0	P1	P2	A1	T
Spec	0.90±0.05	1.95±0.05	0.73±0.05	4.0±0.10	2.0±0.05	2.0±0.05	0.39±0.05	0.20±0.02
symbol	E	F	D0	D1	B2	W	10P0	K8
Spec	1.75±0.10	3.50±0.05	1.50 ^{+0.10} ₋₀	0.50±0.05	1.40±0.05	8.0 ^{+0.3} _{-0.1}	40.0±0.10	0.15MAX
symbol	FHTH							
Spec	3.50±0.05							